

AD-A071 643

AERONAUTICAL RESEARCH LABS MELBOURNE (AUSTRALIA)

F/G 20/4

AN INTRODUCTION TO DYNAMIC DERIVATIVES (2) THE EQUATIONS OF MOT--ETC(U)

AUG 78 G F FORSYTH

UNCLASSIFIED

ARL/AERO NOTE-377

NL

| OF |

AD
A071643



END
DATE
FILMED
8-79
DDC

LEVEL II



DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION
AERONAUTICAL RESEARCH LABORATORIES
MELBOURNE, VICTORIA


AERODYNAMICS NOTE 377

AN INTRODUCTION TO DYNAMIC DERIVATIVES
(2) THE EQUATIONS OF MOTION FOR WIND TUNNEL
PITCH-YAW OSCILLATION RIGS

by

G. F. FORSYTH

Approved for Public Release.



© COMMONWEALTH OF AUSTRALIA 1978

COPY No 11

AUGUST 1978

79 07 24 016

AD A 071 643

DDC FILE COPY

DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION
AERONAUTICAL RESEARCH LABORATORIES

(9) AERODYNAMICS NOTE 377

(6) **AN INTRODUCTION TO DYNAMIC DERIVATIVES**
(2) THE EQUATIONS OF MOTION FOR WIND TUNNEL
PITCH-YAW OSCILLATION RIGS.

by

(10) G. F. FORSYTH


(11) Aug 78

(12) 29p.

(14) ARL/AERO NOTE-377

SUMMARY

↙ The equations of motion are developed for a simplified free flight pitch-yaw system and for spring-mounted and rigidly-driven wind tunnel systems. For the spring-mounted system both initial displacement and forced-oscillation conditions are examined. A simplified cable towed system is also derived. A bibliography is included. ↗



POSTAL ADDRESS: Chief Superintendent, Aeronautical Research Laboratories,
Box 4331, P.O., Melbourne, Victoria, 3001, Australia.

008 650

5013

CONTENTS

	Page No.
NOTATION	
1. INTRODUCTION	1
1.1 The Aero-Normal Notation	1
2. CONSTANT VELOCITY UNDAMPED SYSTEM	1
2.1 Heave Mode	2
2.2 Pitch Mode	3
3. THE DAMPED CONSTANT VELOCITY SYSTEM	3
3.1 Heave Mode	4
3.2 Pitch Mode	4
4. SPRING RESTRAINED PITCH SYSTEM	5
5. SPRING RESTRAINED PITCHING AND PLUNGING SYSTEM	6
6. FORCED SPRING-RESTRAINED PITCH SYSTEM	6
7. CABLE TOWED MODELS	9
7.1 Pitch/Incidence system	9
8. FORCES AND MOMENTS ON A RIGIDLY DRIVEN MODEL	10
8.1 Centre of Rotation at Reference Centre (0, 0, 0)	10
8.2 Centre of Rotation Shifted Along the x-axis (x_0 , 0, 0)	10
8.3 Rigid Translation Along the z-axis	11
9. CONCLUSION	12
REFERENCES (Bibliography)	
DOCUMENT CONTROL DATA	
DISTRIBUTION	

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By _____	
Distribution/ _____	
Availability Codes	
Dist	Avail and/or special
A	

NOTATION

C_x, C_y, C_z	aero-normal coefficient of the force X, Y or Z given by
C_x	$= X/(\frac{1}{2}\rho_e V_e^2 S)$, for example
C_m	aero-normal coefficient of the moment m $= m/(\frac{1}{2}\rho_e V_e^2 S l_0)$
$C_{x\dot{\alpha}}$, etc.	derivatives based on aero-normal force coefficients and aero-normal variables $= \frac{\partial C_x}{\partial \dot{\alpha}} = \frac{1}{\frac{1}{2}\rho_e V_e^2 S} \frac{\partial X}{\partial \dot{\alpha}} = \frac{1}{\frac{1}{2}\rho_e V_e l_0 S} \frac{\partial X}{\partial \dot{\alpha}}$
$C_{m\dot{\alpha}}$, etc.	derivatives based on aero-normal moment coefficients and aero-normal variables $= \frac{\partial C_m}{\partial \dot{\alpha}} = \frac{1}{\frac{1}{2}\rho_e V_e^2 S l_0} \frac{\partial m}{\partial \dot{\alpha}} = \frac{1}{\frac{1}{2}\rho_e V_e S l_0^2} \frac{\partial m}{\partial \dot{\alpha}}$
I_y	moment of inertia about a y -axis
j	$\sqrt{-1}$
K	a constant, derivatives used as spring rates, K_θ & $K_{\dot{\theta}}$
l_0	representative length
m	pitching moment about a y -axis
m_e	mass in stability axes
$\bar{m}_e = \mu$	aero-normal mass
m_α	pitching moment incidence derivative
q	pitch rate; equal to $\dot{\theta}$
S	representative area
T	Tension or Torque; amplitude is T_0
V_e	datum velocity
α	incidence angle, usually sine definition as per Figure 1
Δ	change
η	pitch motivator deflection
θ	pitch angle
θ_c	cable pitch angle
μ	density parameter, aero-normal mass
λ	real part of an exponential solution
ρ_e	datum air density
ω	frequency in radians/second
ω_0	natural frequency, ω for undamped system

Superscript bar means aero-normal terms

1. INTRODUCTION

To measure the forces and moments on a manoeuvring aircraft by taking scale model measurements in a wind-tunnel, it is necessary to know the relationship between the equations of motion for the free flight aircraft and the wind-tunnel model. The reasons for such measurements were discussed⁽⁸⁶⁾ in the first Note of this Series.

The wind-tunnel model system normally will have additional restraints and constraints on its flight. This note will investigate the equations of motion and resulting forces for several such restraints starting with a simplified version of the free-flight arrangement. It is hoped that this will shed light on the advantages and disadvantages of the various methods of oscillating test models which will be studied in the next Note of this Series.

This Note concludes with a bibliography of introductory texts. By no means an exhaustive list, this covers publications before 1970 which are considered complementary to this series of Notes. Lists of later publications can be easily obtained from any of the computer abstracting services.

A single degree of freedom system will be considered throughout and for convenience it will always be a pitch system. A yaw system would be identical, with the appropriate different moment, force and inertia terms, apart from the lack of weight. In fact, any system which measures pitch derivatives can measure yaw derivatives (by, for example, rolling the model ninety degrees). There may be difficulties with freely suspended and cable towed models if all possible modes are not stable, but in general a sensible choice of pivot location will solve these problems.

1.1 The Aero-Normal Notation

For convenience and simplicity of equations and relationships between quantities, most aerodynamic results are expressed in non-dimensional terms. Several schemes for making quantities "normal" exist and the ones of major interest were considered in detail in an earlier publication in this series.⁽⁸⁶⁾ The system used throughout this publication is called the aero-normal notation and is identical to the usual "C" notation for a static case. Coefficients are changed only in that ρ and V become ρ_e and V_e which are the values at some initial condition where the stability axes are fixed. Lengths are divided by l_0 , velocities by V_e , time derivatives by V_e/l_0 (for each differentiation) and mass by $\frac{1}{2}\rho_e S l_0$ which is the mass of a reference volume. Aero-Normal mass is called μ but other quantities are denoted by a superscript bar.

2. CONSTANT VELOCITY UNDAMPED SYSTEM

The equations of motion of a single degree of freedom system may be expressed in terms of Newton's equation for a force and a moment:

$$\text{force} = \text{mass} \times \text{acceleration}$$

$$\text{moment} = \text{moment of inertia} \times \text{angular acceleration.}$$

Ignoring velocity terms, the Z force may be expressed

$$Z = Z_\alpha \alpha + Z_0 \quad (2.1)$$

and the moment as

$$m = m_\alpha \alpha + m_0. \quad (2.2)$$

For a body of mass m_e and moment of inertia I_y , Newton's equations then become:

$$Z_\alpha \alpha + Z_0 = m_e \ddot{z} \quad (2.3)$$

and

$$m_\alpha \alpha + m_0 = I_y \ddot{\theta}. \quad (2.4)$$

If the initial condition is stable and primed variables are changes from this initial condition, these equations may be written

$$Z_{\alpha} \alpha' = m_e \ddot{z} \quad (2.5)$$

and

$$m_{\alpha} \alpha' = I_y \ddot{\theta}. \quad (2.6)$$

Each term in equations 2.5 and 2.6 can be made non-dimensional by multiplying and/or dividing by appropriate constants, as follows:

$$\frac{Z_{\alpha}}{\frac{1}{2} \rho_e V_e^2 S} \alpha' = \frac{m_e}{\frac{1}{2} \rho_e S l_0} \frac{l_0}{V_e^2} \ddot{z} \quad (2.7)$$

which is written⁽⁸⁶⁾

$$C_{z_{\alpha}} \alpha' = \mu \ddot{z}. \quad (2.8)$$

Similarly for the moment expression

$$\frac{m_{\alpha}}{\frac{1}{2} \rho_e V_e^2 S l_0} \alpha' = \frac{I_y}{\frac{1}{2} \rho_e S l_0^3} \frac{l_0^2}{V_e^2} \ddot{\theta} \quad (2.9)$$

which becomes

$$C_{m_{\alpha}} \alpha' = I_y \ddot{\theta}. \quad (2.10)$$

This non-dimensional or aero-normal notation is used throughout this work except where particular cases note otherwise.

These equations of motion (2.8 and 2.10) are connected by the geometric relation

$$\theta = \alpha + \dot{z}/V_e = \alpha + \dot{z}. \quad (2.11)$$

This leaves two independent variables with two separate additive solutions. One way to arrive at each solution is to choose appropriate initial conditions.

2.1 Heave Mode

If initial conditions

$$\theta = 0 \quad (2.12)$$

$$q = \dot{\theta} = 0 \quad (2.13)$$

and

$$\dot{z} = K \quad (2.14)$$

are imposed on the system of equations 2.8, 2.10 and 2.11, a trial solution can be tried:

$$z = z_0 + z_1 e^{j\omega t} \quad (2.15)$$

$$\alpha = \alpha_0 + \alpha_1 e^{j(\omega t + \zeta)} \quad (2.16)$$

$$\theta = \theta_0 + \theta_1 e^{j(\omega t + \xi)}. \quad (2.17)$$

Equation 2.14 means, in conjunction with 2.15, that

$$K = j\omega z_1 e^{j\omega(0)} = j\omega z_1. \quad (2.18)$$

Similarly 2.17 and 2.12 yield

$$0 = \theta_0 + \theta_1 e^{j\xi} \quad (2.19)$$

and 2.17 and 2.13 give

$$0 = j\omega \theta_1 e^{j\xi} \quad (2.20)$$

2.19 and 2.20 further imply

$$\theta_0 = \theta_1 = 0 \quad (2.21)$$

so θ remains at its initial zero value. Then equation 2.11 becomes

$$\alpha = -\dot{z} \quad (2.22)$$

and hence

$$\alpha_0 + \alpha_1 e^{j(\omega t + \zeta)} = -(K/V_e) e^{j\omega t} \quad (2.23)$$

which means, after evaluating this expression for t not zero and $t = 0$, that

$$\alpha_1 = -K/V_e = -\bar{K}$$

and

$$\alpha_0 = -\alpha_1 e^{j\zeta}. \quad (2.24)$$

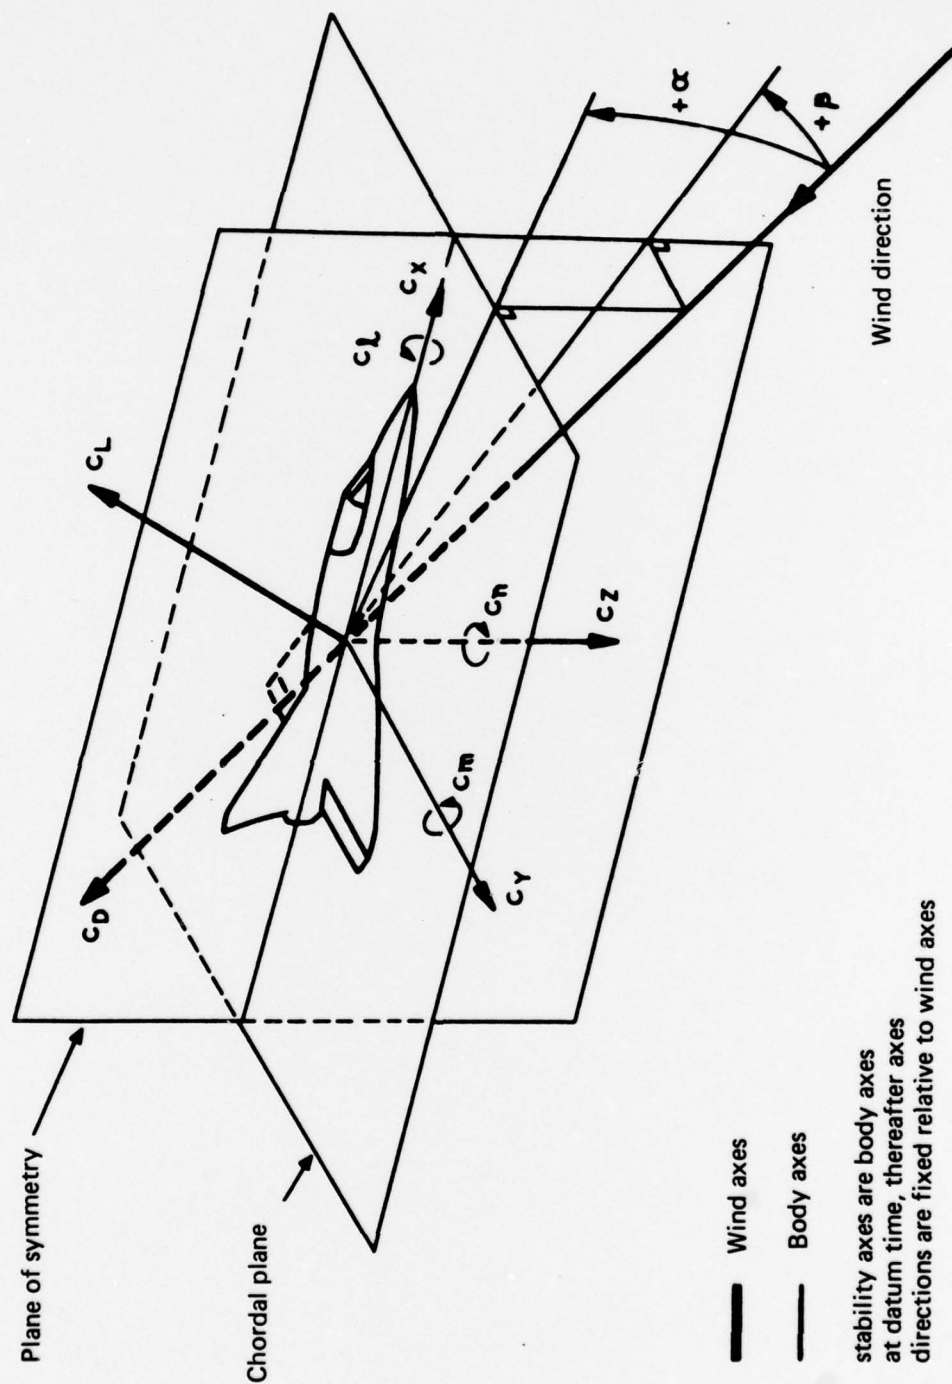


FIG. 1. FORCE AND MOMENT AXES SYSTEM
(Sine definitions of angles)

In equation 2.10, the right hand side term $\ddot{\theta}$ is zero but the left hand side contains no zero terms. The "heave" mode must then assume infinite moment of inertia I_y , and for a constant velocity system equation 2.8 becomes:

$$-C_{z_\alpha} \frac{K}{V_e} e^{j\omega t} = \frac{\mu I_0}{V_e^2} j\omega K e^{j\omega t}. \quad (2.25)$$

Cancelling terms,

$$j\omega = -(V_e C_{z_\alpha})/(\mu I_0), \text{ which is real, } = \lambda, \text{ say.} \quad (2.26)$$

The heave mode is now seen to be an exponential response with

$$z = z_0 + (K/\lambda) e^{\lambda t} \quad (2.27)$$

$$\alpha = -\bar{K} e^{\lambda t} = -(K/V_e) e^{\lambda t} \quad (2.28)$$

where

$$\lambda = -V_e/(\mu I_0) C_{z_\alpha}.$$

2.2 Pitch Mode

Taking new initial conditions

$$\left. \begin{aligned} z(0) &= 0 \\ q(0) &= K \\ \theta(0) &= \alpha(0) = 0 \end{aligned} \right\} \quad (2.29)$$

and

then equations 2.15 to 2.17, the same trial solution as before, give

$$(a) \quad \dot{z}(0) = 0 = j\omega z_1 e^{j\omega 0} \quad (2.30)$$

$$\therefore z = z_0 + z_1 \cos \omega t \quad (2.31)$$

and

$$\alpha = \alpha_1 \sin \omega t \quad (2.32)$$

and

$$\theta = \theta_1 \sin \omega t. \quad (2.33)$$

(b)

$$\dot{\theta} = \omega \theta_1 \cos \omega t$$

$$\theta(0) = \omega \theta_1 = K \quad (2.34)$$

$$\theta_1 = K/\omega$$

$$\therefore \theta = (K/\omega) \sin \omega t. \quad (2.35)$$

Substituting back in our equations of motion,

$$2.10 \rightarrow C_{m_\alpha} \alpha_1 \sin \omega t = -I_y (K/\omega) (I_0^2/V_e^2) \omega^2 \sin \omega t$$

$$\therefore C_{m_\alpha} \alpha_1 = -I_y (K/\omega) \bar{\omega}^2. \quad (2.36)$$

In equation 2.8, the right hand side term \ddot{z} is zero but the left hand side contains no zero terms. The "pitch" mode must then assume infinite aero-normal mass μ . This further implies that

$$\alpha_1 = \theta_1 = K/\omega. \quad (2.37)$$

Substituting for α_1 in 2.36 and clearing,

$$\bar{\omega}^2 = -C_{m_\alpha}/I_y. \quad (2.38)$$

The pitch mode is thus a steady sinusoidal oscillation in both pitch and incidence.

The system of this section is not physically realizable. Real systems have losses (damping) and in the next section damping terms will be considered.

3. THE DAMPED CONSTANT VELOCITY SYSTEM

The equations of motion considering velocity terms in the aerodynamic forces become

$$C_{z_\alpha} \alpha' + C_{z_\dot{\alpha}} \dot{\alpha} + C_{z_q} \dot{q} = \mu \ddot{z} \quad (3.1)$$

and

$$C_{m_\alpha} \alpha' + C_{m_\dot{\alpha}} \dot{\alpha} + C_{m_q} \dot{q} = I_y \ddot{\theta} \quad (3.2)$$

with

$$\theta = \alpha' + \dot{z} \quad (3.3)$$

where primed variables are changes from initial conditions and all terms are aero-normal. The same two sets of initial conditions are considered for this system as for the undamped system in the previous section.

3.1 Heave Mode

Assume initial conditions

$$\left. \begin{aligned} \theta &= 0 \\ \dot{\theta} &= 0 \\ \dot{z} &= K. \end{aligned} \right\} \quad (3.4)$$

As in section 2.1, the first two conditions are met by

$$\theta(t) = 0 \quad (3.5)$$

and a solution of the form

$$z = z_0 + z_1 e^{\lambda t} \quad (3.6)$$

$$\alpha = \alpha_0 + \alpha_1 e^{\lambda t} \quad (3.7)$$

is tried.

Equation 3.3 gives

$$0 = \alpha_1 e^{\lambda t} + (z_1 \lambda e^{\lambda t})/V_e \quad (3.8)$$

$$\therefore \alpha_1 = -\bar{z}_1 \bar{\lambda}. \quad (3.9)$$

From 3.4,

$$\dot{z}(0) = z_1 \lambda e^{\lambda 0} = K$$

$$= z_1 \lambda$$

$$\therefore z_1 = K/\lambda \text{ or } \bar{z}_1 = \bar{K}/\bar{\lambda}. \quad (3.10)$$

Hence from 3.9 and 3.10,

$$\alpha_1 = -\bar{K}. \quad (3.11)$$

Substituting back in equation 3.1,

$$-\bar{K} C_{z_{\alpha}} e^{\lambda t} - \bar{K} \bar{\lambda} C_{z_{\alpha}} e^{\lambda t} = \mu (\bar{K} \bar{\lambda}) e^{\lambda t} \quad (3.12)$$

$$\text{so } \bar{\lambda} = -C_{z_{\alpha}}/(\mu + C_{z_{\alpha}}). \quad (3.13)$$

3.2 Pitch Mode

Assuming new initial conditions

$$\left. \begin{aligned} \dot{z}(0) &= 0 \\ q(0) &= K \\ \theta(0) = \alpha'(0) &= 0 \end{aligned} \right\} \quad (3.14)$$

and trial solutions

$$\left. \begin{aligned} z &= z_e \\ \alpha' = \theta &= \alpha_0 e^{\lambda t} e^{j\omega t} \end{aligned} \right\} \quad (3.15)$$

then

$$q(0) = K = \alpha_0 \lambda e^{\lambda 0} e^{j\omega 0} + j\omega \alpha_0 e^{\lambda 0} e^{j\omega 0} \quad (3.16)$$

and

$$\begin{aligned} \theta(0) &= 0 = \alpha_0 e^{\lambda 0} e^{j\omega 0} \\ &= \alpha_0 \sin(\omega 0) \end{aligned} \quad (3.17)$$

as the cosine term must be zero also.

From 3.17

$$\alpha' = \theta = \alpha_0 e^{\lambda t} \sin(\omega t) \quad (3.18)$$

and 3.16 becomes $K = \alpha_0 \lambda 0 + \alpha_0 e^0 \omega \cos(\omega 0)$

$$= \omega \alpha_0$$

$$\therefore \alpha_0 = K/\omega \quad (3.19)$$

and the equation of motion becomes 3.2

$$\begin{aligned} C_{m_x}(\bar{K}/\omega) e^{\lambda t} \sin(\omega t) + (C_{m_x} + C_{m_q}) \{[(\bar{K}\bar{\lambda})/\bar{\omega}] e^{\lambda t} \sin(\omega t) + \bar{K} e^{\lambda t} \cos(\omega t)\} = \\ = I_y \bar{K} \{2\bar{\lambda} \cos(\omega t) + [(\bar{\lambda}^2 - \bar{\omega}^2)/\bar{\omega}] \sin \omega t\} e^{\lambda t}. \end{aligned} \quad (3.20)$$

By equating the sine and cosine terms, and clearing,

$$C_{m_x} + C_{m_q} = 2\bar{\lambda} I_y \quad (3.21)$$

and

$$C_{m_x} + (C_{m_x} + C_{m_q}) \lambda = I_y (\bar{\lambda}^2 - \bar{\omega}^2). \quad (3.22)$$

Substituting 3.21 into 3.22 then gives

$$C_{m_x} = -(\bar{\lambda}^2 + \bar{\omega}^2) I_y \quad (3.23)$$

$$= -\bar{\omega}_0^2 I_y. \quad (3.24)$$

This is of the same form as in the previous section (Eqn 2.38) but ω is now the complex quantity ω_0 . For a dynamically (as well as statically) stable system, the real part of ω_0 must be negative. If positive, i.e. $\lambda > 0$, any disturbance in pitch will grow.

The two modes, heave and pitch, of 3.1 and 3.2, exist concurrently, and a suitable choice of initial conditions shows both. However, as long as the time scales of the two disturbances are sufficiently different, say one more than forty percent longer than the other, the resultant remains simply the sum of the two disturbances.

The damped pitch disturbance occurs in aircraft (fixed controls) and can be simulated in a wind-tunnel with low friction pivots. The heave mode does not however occur in this constant velocity form. In flight, speed will change as the aircraft climbs or falls modifying the result. In a wind tunnel it is difficult to simulate translations; a rotation about a point not at the reference centre will be considered instead.

4. SPRING RESTRAINED PITCH SYSTEM

Consider a system where, as well as the aerodynamic terms, there are structural stiffness (K_θ) and damping ($K_\dot{\theta}$) terms but heaving motions are constrained. For the wind-off or tare case, but non-dimensionalizing as for the wind-on case to be considered next,

$$I_y \ddot{\theta} = \bar{K}_\theta \theta + \bar{K}_\dot{\theta} \dot{\theta} \quad (4.1)$$

which has the solution

$$\theta = \theta_0 e^{(\lambda_t + j\omega_t)t} \quad (4.2)$$

with

$$\bar{K}_\theta = 2\bar{\lambda}_t I_y \quad (4.3)$$

and

$$\bar{K}_\dot{\theta} = -(\bar{\omega}_t^2 + \bar{\lambda}_t^2) I_y \quad (4.4)$$

where

$$\bar{\lambda}_t = \lambda_t I_0 / V_e \quad \text{and} \quad \bar{\omega}_t = \omega_t I_0 / V_e$$

with V_e referring to the wind-on case.

Since a pitch system with $\alpha = \theta$ is being considered, the wind-on case becomes:

$$I_y \ddot{\theta} = (\bar{K}_\theta + C_{m_x}) \theta + (\bar{K}_\dot{\theta} + C_{m_x} + C_{m_q}) \dot{\theta} \quad (4.5)$$

which has the solution

$$\theta = \theta_0 e^{(\lambda + j\omega)t} \quad (4.6)$$

with

$$\bar{K}_\theta + C_{m_x} + C_{m_q} = 2\bar{\lambda} I_y \quad (4.7)$$

and

$$\bar{K}_\dot{\theta} + C_{m_x} = -(\bar{\omega}^2 + \bar{\lambda}^2) I_y. \quad (4.8)$$

From equations 4.3 and 4.7

$$C_{m_x} + C_{m_q} = 2(\bar{\lambda} - \bar{\lambda}_t) I_y \quad (4.9)$$

and from equations 4.4 and 4.8

$$C_{m_x} = -(\bar{\lambda}^2 - \bar{\lambda}_t^2 + \bar{\omega}^2 - \bar{\omega}_t^2) I_y \quad (4.10)$$

$$= (\bar{\omega}_0^2 - \bar{\omega}_t^2) I_y \quad (4.11)$$

using the results of Section 3.

The terms on the left in 4.9 and 4.10/11 are the same as those responsible for the behaviour of the pitch system in Section 3 and the equations are the difference between two sets of results of the form of that Section. This convenient relationship means that this system is often used in wind-tunnel testing.

5. SPRING RESTRAINED PITCHING AND PLUNGING SYSTEM

If the centre of rotation is moved from the origin as in Section 4 to $(-x_0, 0, 0)$ in the body co-ordinates, then

$$\theta = \alpha + \dot{z} \quad (5.1)$$

$$= \alpha + \dot{z}/V_e$$

and

$$\theta = z/x_0. \quad (5.2)$$

The equation of motion is far more complicated

$$\mu \bar{x}_0^2 \ddot{\theta} + I_y \ddot{\theta} = \bar{K}_\theta \theta + \bar{K}_\theta \dot{\theta} + C_{m_x} \alpha + C_{m_{\dot{x}}} \dot{\alpha} + C_{m_q} \ddot{\theta} + C_{z_x} \bar{x}_0 \alpha + C_{z_{\dot{x}}} \bar{x}_0 \dot{\alpha} + C_{z_q} \bar{x}_0 \ddot{\theta}. \quad (5.3)$$

Equations 5.1 and 5.2 give

$$\theta = \alpha + \bar{x}_0 \ddot{\theta}. \quad (5.4)$$

The moment of inertia about the new y_1 axis

$$I_{y_1} = I_y + \mu \bar{x}_0^2. \quad (5.5)$$

Substituting 5.4 and 5.5 in equation 5.3 gives

$$I_{y_1} \ddot{\theta} = (\bar{K}_\theta + C_{m_x} + \bar{x}_0 C_{z_x}) \theta + (\bar{K}_\theta - \bar{x}_0 C_{m_x} + C_{m_{\dot{x}}} + C_{m_q} - \bar{x}_0^2 C_{z_x} + \bar{x}_0 C_{z_{\dot{x}}} + \bar{x}_0 C_{z_q}) \dot{\theta} - \bar{x}_0 (C_{m_{\dot{x}}} + \bar{x}_0 C_{z_{\dot{x}}}) \ddot{\theta}. \quad (5.6)$$

Tare values give

$$\bar{K}_\theta = 2\bar{\lambda}_t I_{y_1} \quad (5.7)$$

and

$$\bar{K}_\theta = -(\bar{\omega}_t^2 + \bar{\lambda}_t^2) I_{y_1} = -\bar{\omega}_t^2 I_{y_1}. \quad (5.8)$$

For the wind-on case, try a solution

$$\theta = \theta_0 e^{(\lambda + j\omega)t}. \quad (5.9)$$

$$\text{Then } \bar{K}_\theta + C_{m_x} + C_{m_q} + \bar{x}_0 (C_{z_{\dot{x}}} + C_{z_q} - C_{m_x}) - \bar{x}_0^2 C_{z_x} = 2\lambda (I_{y_1} + \bar{x}_0 C_{m_{\dot{x}}} + \bar{x}_0^2 C_{z_{\dot{x}}}) \quad (5.10)$$

and

$$\begin{aligned} \bar{K}_\theta + C_{m_x} + \bar{x}_0 C_{z_x} &= -(\bar{\lambda}^2 + \bar{\omega}^2) (I_{y_1} + \bar{x}_0 C_{m_{\dot{x}}} + \bar{x}_0^2 C_{z_{\dot{x}}}) = \\ &= -\omega_0^2 (I_{y_1} + \bar{x}_0 C_{m_{\dot{x}}} + \bar{x}_0^2 C_{z_{\dot{x}}}). \end{aligned} \quad (5.11)$$

Substituting 5.8 into 5.11,

$$C_{m_x} + \bar{x}_0 C_{z_x} = -(\bar{\omega}_0^2 - \bar{\omega}_t^2) I_{y_1} - \bar{\omega}_0^2 \bar{x}_0 (C_{m_{\dot{x}}} + \bar{x}_0 C_{z_{\dot{x}}}). \quad (5.12)$$

Similarly 5.7 into 5.10 gives

$$(C_{m_{\dot{x}}} + \bar{x}_0 C_{z_{\dot{x}}}) + (C_{m_q} + \bar{x}_0 C_{z_q}) - \bar{x}_0 (C_{m_x} + \bar{x}_0 C_{z_x}) = 2(\bar{\lambda} - \bar{\lambda}_t) I_{y_1} + 2\bar{\lambda} \bar{x}_0 (C_{m_{\dot{x}}} + \bar{x}_0 C_{z_{\dot{x}}}). \quad (5.13)$$

Using 5.12, equation 5.13 becomes:

$$(C_{m_{\dot{x}}} + \bar{x}_0 C_{z_{\dot{x}}}) (1 + \bar{x}_0^2 \bar{\omega}_0^2 - 2\bar{\lambda} \bar{x}_0) + (C_{m_q} + \bar{x}_0 C_{z_q}) = [2(\bar{\lambda} - \bar{\lambda}_t) - \bar{x}_0 (\bar{\omega}_0^2 - \bar{\omega}_t^2)] I_{y_1}. \quad (5.14)$$

This is complicated. However if values for $x_0 = 0$ are known it allows measurement of $C_{z_{\dot{x}}}$ and estimation of the split between $C_{m_{\dot{x}}}$ and C_{m_q} which have appeared together up to now.

6. FORCED SPRING-RESTRAINED PITCH SYSTEM

To the system of Section 4 a torque $\bar{T}_0 e^{j\Omega t}$ is added. The tare case becomes:

$$I_y \ddot{\theta} = \bar{K}_\theta \theta + \bar{K}_\theta \dot{\theta} + \bar{T}_0 e^{j\Omega t}. \quad (6.1)$$

The homogeneous solution ($T_0 = 0$) was given in Section 4

$$\theta = \theta_0 e^{(\lambda_t + j\omega_t)t} \quad (4.2)$$

where $\bar{K}_\delta = 2\bar{\lambda}_t I_y$ (4.3)

and $\bar{K}_\theta = -(\omega_t^2 + \bar{\lambda}_t^2) I_y$ (4.4)

$$= -\omega_{0_t}^2 I_y. \quad (6.2)$$

The complete solution in the tare case is thus

$$\theta = \theta_0 e^{(\lambda_t + j\omega_t)t} + \theta_1 e^{j(\Omega t + \xi)} \quad (6.3)$$

where it may be shown that

$$\begin{aligned} \xi &= \tan^{-1} [(-\bar{K}_\delta \bar{\Omega}) / (I_y \bar{\Omega}^2 + \bar{K}_\theta)], \text{ which using 4.3 and 4.4,} \\ &= \tan^{-1} [(-2\bar{\lambda}_t \bar{\Omega}) / (\bar{\Omega}^2 - \omega_{0_t}^2)] \end{aligned} \quad (6.4)$$

and also $\theta_1 = -\frac{T_0}{I_y [4\bar{\lambda}_t^2 \bar{\Omega}^2 + (\bar{\Omega}^2 - \omega_{0_t}^2)^2]^{\frac{1}{2}}}$ (6.5)

Note that for zero tare damping, i.e. $\lambda_t = 0$, then $\xi = 0$ so that the oscillation is in phase with the applied torque, and

$$\theta_1 = T_0 / [I_y (\omega_{0_t}^2 - \bar{\Omega}^2)] \quad (6.7)$$

which is infinite at resonance.

The wind-on equation of motion is

$$I_y \ddot{\theta} = \bar{K}_\theta \theta + \bar{K}_\delta \dot{\theta} + C_{m_\alpha} \theta + C_{m_{\dot{\alpha}}} \dot{\theta} + C_{m_q} \dot{\theta} + T_0 e^{j\Omega t}. \quad (6.8)$$

The solution† is of the form

$$\theta = \theta_0 e^{(\lambda + j\omega)t} + \theta_1 e^{j(\Omega t + \xi)} \quad (6.9)$$

where $C_{m_\alpha} = -(\omega_0^2 - \omega_{0_t}^2) I_y$ (6.10)

$$C_{m_{\dot{\alpha}}} + C_{m_q} = 2(\bar{\lambda} - \bar{\lambda}_t) I_y \quad (6.11)$$

and $\xi = \tan^{-1} [(2\bar{\lambda} \bar{\Omega}) / (\omega_0^2 - \bar{\Omega}^2)]$ (6.12)

remembering $\omega_0^2 = \omega^2 + \bar{\lambda}^2$ (6.13)

and where $\theta_1 = T_0 / \{I_y [4\bar{\lambda}^2 \bar{\Omega}^2 + (\bar{\Omega}^2 - \omega_0^2)^2]^{\frac{1}{2}}\}$. (6.14)

For zero damping ($\lambda = 0$) equation 6.14 reduces to

$$\theta_1 = T_0 / [I_y (\omega_0^2 - \bar{\Omega}^2)] \quad (6.15)$$

which again gives infinite amplitude for the resonance condition $\omega_0 = \bar{\Omega}$.

For non-zero damping, the resonance condition gives $\xi = \tan^{-1} \infty = 90$ degrees for both tare and wind-on cases. In the tare case,

$$\bar{\Omega}_t = \omega_{0_t} \quad (6.16)$$

then $\theta_1 = T_0 / (2I_y \bar{\lambda}_t \bar{\Omega})$. (6.17)

For wind-on

$$\bar{\Omega} = \omega_0 \quad (6.18)$$

then $\theta_1 = T_0 / (2I_y \bar{\lambda} \bar{\Omega})$. (6.19)

Combining these equations


$$C_{m_{\dot{\alpha}}} + C_{m_q} = T_0 / (\bar{\Omega} \theta_1) - T_0 / (\bar{\Omega}_t \theta_{1_t}). \quad (6.20)$$

If tare and wind-on tests have the same amplitude, and stiffness can be varied to obtain the same frequency, then, providing \bar{K}_δ is the same,


$$C_{m_{\dot{\alpha}}} + C_{m_q} = (T_0 - T_{0_t}) / (\bar{\Omega} \theta_1). \quad (6.21)$$

This is similar to the results obtained for free oscillation with the decay rate replaced by a torque input. It has an advantage in that the output is steady and measurements can be averaged over long time periods for high accuracy. As with the free system an estimation of the split of $C_{m_{\dot{\alpha}}}$ and C_{m_q} requires multiple axis locations.


† S. Timoshenko, Vibration Problems in Engineering. Van Nostrand 1928.

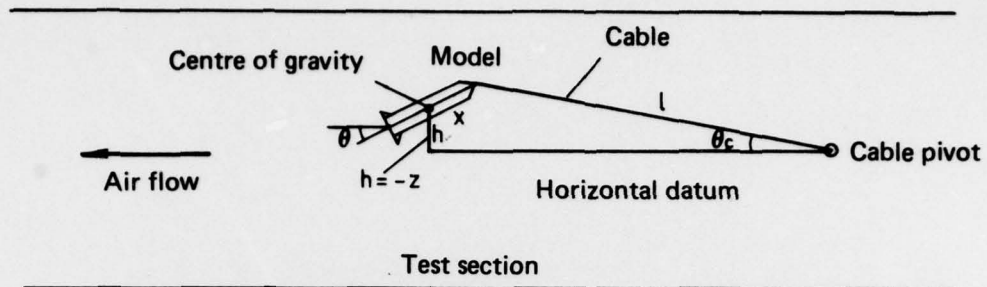

(a) Relations, angles and lengths for towed models ($h \triangleq -x \theta + l \theta_c$)

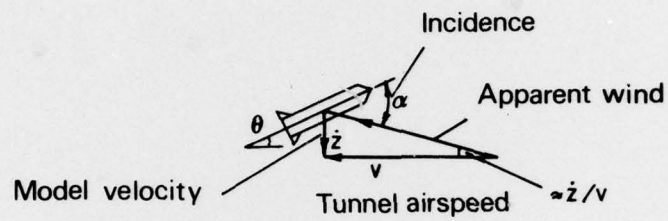

(b) Relations, angles and velocities for towed models ($\alpha = \theta - \dot{z}/v$)

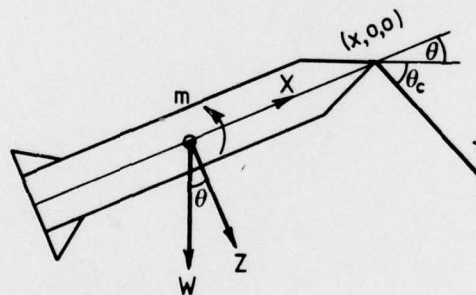

(c) Forces and moment Towed model ($T = -x \cos(\theta + \theta_c) - Z \sin(\theta + \theta_c) + mx \sin(\theta + \theta_c) - W \sin \theta_c$)

FIG. 2. RELATIONSHIPS REQUIRED FOR SECTION 7

7. CABLE TOWED MODELS

7.1 Pitch/Incidence System

Consider a wind tunnel model on a long, flexible cable. The constraint conditions are taken to be:

- (i) The cable is inextensible (length l), massless and dragless;
- (ii) No moment about the point of attachment is provided by the cable which is attached distance x ahead of the model centre of gravity;
- (iii) No disturbance in roll or yaw exists implying that the roll-yaw system must be statically and dynamically stable and have natural frequencies sufficiently different from those of the pitch/incidence system to minimize cross-excitation of one system on the other.

Condition (i) means that the force on the cable must equal the tension T in the cable. Resolution of all the forces acting leads (Fig. 2a) to the expression

$$T = -X \cos(\theta + \theta_c) - Z \sin(\theta + \theta_c) + mx \sin(\theta + \theta_c) - W \sin \theta_c \quad (7.1)$$

for the tension in the cable, and

$$-\Delta L = Z \cos \theta + W - X \sin \theta + T \sin \theta_c \quad (7.2)$$

for the force unbalance in the vertical direction. This will equal zero for a static equilibrium.

Similar resolution yields

$$\Delta m = m + Tx \sin(\theta + \theta_c) \quad (7.3)$$

for the resulting pitching moment. In each of these three equations, the terms have not been made non-dimensional as yet, in order to show the precise nature of some approximations made.

For θ and θ_c both small, from Fig. 2,

$$\begin{aligned} T \sin \theta_c &\approx [-X - Z(\theta + \theta_c) + mx(\theta + \theta_c) - W\theta_c] \theta_c \\ &\approx -X \theta_c \end{aligned} \quad (7.4)$$

being first order in θ_c , and similarly

$$Tx \sin(\theta + \theta_c) \approx -Xx(\theta + \theta_c). \quad (7.5)$$

The nett vertical force is then

$$-\Delta L \approx Z + W - X(\theta + \theta_c) \quad (7.6)$$

and the nett moment about the y-axis is

$$\Delta m \approx m - Xx(\theta + \theta_c). \quad (7.7)$$

Now θ , θ_c , z and α are related (Fig. 2b) by

$$z = x\theta - l\theta_c \quad (7.8)$$

and

$$\alpha = \theta - \dot{z}/V. \quad (7.9)$$

From equations 7.8 and 7.9 it is clear that there are still only two independent variables as in Sections 2 and 3. So comparisons can be made with the equations derived in those sections, the equations of motion are considered in non-dimensional form.

If the initial conditions represent equilibrium, then

$$C_{z_0} + W = 0 \quad (\text{"lift" = weight}) \quad (7.10)$$

and

$$C_{m_0} + C_{m_\eta} \cdot \eta = 0 \quad (\text{zero moments}) \quad (7.11)$$

and the equations of motion become

$$C_{z_x} \alpha + C_{z_{\dot{x}}} \dot{\alpha} + C_{z_q} \dot{q} - (\theta + \theta_c)(C_{x_0} + C_{x_\alpha} \alpha + C_{x_{\dot{x}}} \dot{\alpha} + C_{x_q} \dot{q}) = \mu \ddot{z} \quad (7.12)$$

$$\text{and} \quad C_{m_x} \alpha + C_{m_{\dot{x}}} \dot{\alpha} + C_{m_q} \dot{q} - x(\theta + \theta_c)(C_{x_0} + C_{x_\alpha} \alpha + C_{x_{\dot{x}}} \dot{\alpha} + C_{x_q} \dot{q}) = I_y \ddot{\theta}. \quad (7.13)$$

It is assumed that the solution of these equations can be divided into two additive modes as in Sections 2 and 3. It is further assumed that one way of representing these modes is by separating Equation 7.9 by zeroing one, then the other, of the right hand terms. These modes

are then the "pitch" and "heave" modes of Sections 2 and 3, and the equations of motion become:

$$-C_{z_x} \ddot{z} - C_{z_{\dot{x}}} \dot{z} - (\ddot{z}/l) (-C_{x_0} + C_{x_x} \dot{z} + C_{x_{\dot{x}}} \ddot{z}) = \mu \ddot{z} \quad (7.14)$$

for the mode with

$$\dot{z} = -\alpha \quad (7.15)$$

and

$$C_{m_x} \theta + (C_{m_{\dot{x}}} + C_{m_q}) \dot{\theta} - x \theta [C_{x_0} + C_{x_x} \theta + (C_{x_{\dot{x}}} + C_{x_q}) \dot{\theta}] = I_y \ddot{\theta} \quad (7.16)$$

for the mode with

$$\theta = \alpha. \quad (7.17)$$

Both 7.14 and 7.16 are non-linear differential equations. The effect of the tow cable is to introduce a non-linear additional stiffness to each mode. If terms of more than first order can be ignored, these equations become:

$$-C_{z_x} \ddot{z} - C_{z_{\dot{x}}} \dot{z} + C_{x_0} (\ddot{z}/l) = \mu \ddot{z} \quad (7.18)$$

and

$$(C_{m_x} - x C_{x_0}) \theta + (C_{m_{\dot{x}}} + C_{m_q}) \dot{\theta} = I_y \ddot{\theta}. \quad (7.19)$$

Equation 7.19 is identical in form to the spring restrained pitch system of Section 4 with spring constant

$$K_\theta = -x C_{x_0} \quad (7.20)$$

and spring damping

$$K_{\dot{\theta}} = 0. \quad (7.21)$$

8. FORCES AND MOMENTS ON A RIGIDLY-DRIVEN MODEL

If a model of mass m_e and of moment of inertia about its centre of mass I_y is driven rigidly, then a force and moment balance between the model and the driving mechanism measures inertial as well as aerodynamic terms. The balance axis system is a body-axis set, and not the fixed "stability axes" used for other methods of driving oscillatory models. Two positions of the axis of rotation are considered as well as a simple translation. The balance is considered to be rigid in comparison with the movement applied.

8.1 Centre of Rotation at Reference Centre (0, 0, 0)

For a rigid sinusoidal pitch oscillation about the y -axis,

$$\alpha = \alpha_0 + \theta_1 \sin \omega t \quad (8.1)$$

$$\theta = \theta_0 + \theta_1 \sin \omega t \quad (8.2)$$

$$\dot{\alpha} = \dot{\theta} = \omega \theta_1 \cos \omega t \quad (8.3)$$

$$\ddot{\alpha} = \ddot{\theta} = -\omega^2 \theta_1 \sin \omega t. \quad (8.4)$$

The z force coefficient has the form, where g is the acceleration due to gravity and μ is the non-dimensional model mass (m_e),

$$C_z = \mu \bar{g} \cos(\alpha_0 + \theta_1 \sin \omega t) + C_{z_0} + C_{z_{\alpha}} \theta_1 \sin \omega t + (C_{z_{\dot{\alpha}}} + C_{z_q}) \omega \theta_1 \cos \omega t. \quad (8.5)$$

For a small amplitude θ_1 this may be approximated by

$$C_z = (\mu \bar{g} \cos \alpha_0 + C_{z_0}) + (C_{z_{\alpha}} - \mu \bar{g} \sin \alpha_0) \theta_1 \sin \omega t + (C_{z_{\dot{\alpha}}} + C_{z_q}) \omega \theta_1 \cos \omega t \quad (8.6)$$

where the three terms are the static, in-phase and quadrature components of the force with respect to the motion, respectively.

The pitching moment coefficient is given by

$$C_m = (C_{m_0} + C_{m_{\eta}} \eta') + (C_{m_{\alpha}} - \omega^2 I_y) \theta_1 \sin \omega t + (C_{m_{\dot{\alpha}}} + C_{m_q}) \omega \theta_1 \cos \omega t \quad (8.7)$$

where the same comment about the three terms applies and where η' is a fixed control deflection.

8.2 Centre of Rotation Shifted Along the x -axis ($x_0, 0, 0$)

If the model is rotated about an axis x_0 ahead of the y -axis, α and θ are no longer co-incident quantities. As always, from the definitions of the angles of pitch and incidence,

$$\theta = \alpha + \dot{z}, \quad \text{i.e.} = \alpha + \dot{z}/V_e. \quad (8.8)$$

In this case

$$\theta = z/x_0, \quad \text{also.} \quad (8.9)$$

Thus $\theta = \alpha + \bar{x}_0 \bar{q}$ (8.10)

which is the same as equation 5.4 for the spring-restrained system.

The model now has moment of inertia

$$I_{y_1} = I_y + x_0^2 m_e$$

i.e. $I_{y_1} = I_y + \bar{x}_0^2 \mu$. (8.11)

The oscillating model now has a linear acceleration term in its force equation. The equations of motion are now

$$\theta = \theta_0 + \theta_1 \sin \omega t \quad (8.12)$$

and $\alpha = \theta_0 + \theta_1 \sin \omega t - \bar{x}_0 \bar{\omega} \theta_1 \cos \omega t$ (8.13)

with derivatives

$$\dot{\theta} = \dot{q} = \theta_1 \bar{\omega} \cos \omega t \quad (8.14)$$

$$\ddot{\alpha} = \theta_1 \bar{\omega} \cos \omega t + \bar{x}_0 \theta_1 \bar{\omega}^2 \sin \omega t \quad (8.15)$$

$$\ddot{z} = -\bar{x}_0 \bar{\omega}^2 \theta_1 \sin \omega t \quad (8.16)$$

and $\ddot{\theta} = \ddot{q} = -\theta_1 \bar{\omega}^2 \sin \omega t$. (8.17)

Then the z force coefficient has the form

$$C_z = C_{z_0} + \mu \bar{g} \cos \theta + \mu \ddot{z} + C_{z_\alpha} \alpha + C_{z_{\dot{\alpha}}} \dot{\alpha} + C_{z_q} q. \quad (8.18)$$

If the oscillation amplitude θ_1 is small

$$\cos \theta \approx \cos \theta_0 - \sin(\theta_0) \theta_1 \sin \omega t. \quad (8.19)$$

Including all the constant terms in C_{z_0} to make C_{z_0}' and substituting for the angles in 8.18,

$$C_z = C_{z_0}' + [C_{z_\alpha} + \mu (\bar{x}_0 \bar{\omega}^2 - \bar{g} \sin \theta_0) + C_{z_{\dot{\alpha}}} \bar{x}_0 \bar{\omega}^2] \theta_1 \sin \omega t + (C_{z_{\dot{\alpha}}} + C_{z_q} - \bar{x}_0 C_{z_\alpha}) \bar{\omega} \theta_1 \cos \omega t. \quad (8.20)$$

The pitching moment is even more complicated. The moment about the new axis is given by

$$m' = m + x_0 Z \quad (8.21)$$

i.e. $C_{m'} = C_m + \bar{x}_0 C_z$. (8.22)

The balance however measures moments about the reference axis, i.e. C_m . The expression for this is exactly as before:

$$C_m = (C_{m_0} + C_{m_\eta} \eta') + (C_{m_\alpha} - \bar{\omega}^2 I_y) \theta_1 \sin \omega t + (C_{m_{\dot{\alpha}}} + C_{m_q}) \bar{\omega} \theta_1 \cos \omega t. \quad (8.7)$$

Moments about the new axis can be obtained using Equations 8.7, 8.20 and 8.22.

8.3 Rigid Translation Along the z -axis

If the motion inexorably impressed on the model is a z translation and not a rotation, pitch angle θ remains a constant, say zero. Then from equation 8.8

$$\alpha = -\ddot{z} \quad (8.23)$$

and for a motion $z = z_0 + z_1 \sin \omega t$ (8.24)

$$\alpha = -\ddot{z}_1 \bar{\omega} \cos \omega t \quad (8.25)$$

and $\dot{\alpha} = \ddot{z}_1 \bar{\omega}^2 \sin \omega t$. (8.26)

The z -force and pitching moment coefficients are given by, ignoring static valves,

$$C_z = C_{z_\alpha} \alpha + C_{z_{\dot{\alpha}}} \dot{\alpha} + \mu \ddot{z} \quad (8.27)$$

and $C_m = C_{m_\alpha} \alpha + C_{m_{\dot{\alpha}}} \dot{\alpha}$ (8.28)

and using 8.25, 8.26 these become

$$C_z = -C_{z_\alpha} \ddot{z}_1 \bar{\omega} \cos \omega t + (C_{z_{\dot{\alpha}}} - \mu) \ddot{z}_1 \bar{\omega}^2 \sin \omega t \quad (8.29)$$

and $C_m = -C_{m_\alpha} \ddot{z}_1 \bar{\omega} \cos \omega t + C_{m_{\dot{\alpha}}} \ddot{z}_1 \bar{\omega}^2 \sin \omega t$. (8.30)

9. CONCLUSION

The equations of motion have been developed for a simplified free flight pitch-yaw system and for spring-mounted and rigidly-driven wind tunnel systems. For the spring-mounted system both initial displacement and forced-oscillation conditions have been examined. A simplified cable towed system has also been derived. These equations will be used in later Notes of this Series.

REFERENCES (Bibliography)

Texts

1. B. Etkin Dynamics of Flight. Wiley 1959.
2. B. M. Jones Dynamics of the Airplane. Volume V of Aerodynamic Theory.
Editor W. Durand Springer 1935.
3. H. N. Abramson The Dynamics of Airplanes. Ronald 1958.
4. A. Miele Flight Mechanics. Vol. I, Theory of Flight Paths.
Addison-Wesley, 1962.

Notation

5. L. Bryant and S. Gates Nomenclature for Stability Co-ordinates.
ARC R & M 1801, 1937.
6. H. R. Hopkin A Scheme of Notation and Nomenclature for Aircraft Dynamics
and Associated Aerodynamics. RAE TR66200 (5 parts) 1966,
RAE TR66200 A 1968. Also ARC R & M 3562 (5 parts) 1970.
7. C. H. E. Warren The Definitions of the Angles of Incidence and Sideslip.
RAE T.N. Aero 2178, ARC CP 124, 1952.

General

8. J. B. Bratt Wind Tunnel Techniques for the Measurement of Oscillatory
Derivatives. ARC R & M 3319, 1960.
9. L. Arnold Dynamic Measurements in Wind Tunnels. AGARDograph 11, 1955.
10. C. J. Schueler, Techniques for Measurement of Dynamic Stability Derivatives in
L. K. Ward Ground Test Facilities.
and A. E. Hodapp AGARDograph 121, 1967.
11. K. Orlik-Rückemann Methods of Measurement of Aircraft Dynamic Stability Deriva-
tives. N.R.C. of Canada LR-254, 1959.
12. M. Scherer Mesure des Derivees Aerodynamiques en Soufflerie et en Vol.
et P. Mathe AGARD Rapport 346, 1961.

Particular Methods—Longitudinal

13. J. S. Thompson Oscillatory Derivative Measurements on Sting-Mounted Wind
and R. A. Fail Tunnel Models at RAE, Bedford. RAE TR 66197, 1966.
14. H. G. Wiley A Method of Accurately Measuring Dynamic Stability Derivatives
and A. L. Braslow in Transonic and Supersonic Wind Tunnels.
AGARD Report 345, 1961.
15. L. H. G. Sterne A Proposed Apparatus for Measuring Oscillatory Aerodynamic
Derivatives. ARC R & M 3260, 1962.
16. J. S. Thompson Oscillatory Derivative Measurements on Sting-Mounted Wind
and R. A. Fail Tunnel Models: Method of Test and Results for Pitch and Yaw
on a Cambered Ogee Wing at Mach Numbers up to 2.6.
RAE Report Aero 2668, 1962.

Particular Methods—Longitudinal—continued

17. J. B. Bratt A Note on Derivative Apparatus for the NPL 9½ inch High Speed Tunnel. ARC CP 269, 1956.
18. A. L. Braslow,
 H. G. Wiley
 and C. Q. Lee A Rigidly Forced Oscillation System for Measuring Dynamic-Stability Parameters in Transonic and Supersonic Wind Tunnels. N.A.S.A. TND 1231, 1962.
19. F. J. Regan
 and J. A. Iandolo Instrumentation, Technique and Analysis Used at the Naval Ordnance Laboratory for the Determination of Dynamic Derivatives in the Wind Tunnel. NOL TR 66-23, 1966.
20. R. C. Maydew
 and J. C. Weydert Free-Oscillation Variable-Deflection Dynamic Rig. SCR-130, 1959.

Particular Methods—Lateral

21. B. H. Beam A Wind-Tunnel Test Technique for Measuring the Dynamic Rotary Stability Derivatives Including the Cross Derivatives at High Mach Numbers. NACA TN3347, 1955.
22. H. C. Lessing,
 T. B. Fryer
 and M. H. Mead A System for Measuring the Dynamic Lateral Stability Derivatives in High-Speed Wind Tunnels. NACA TN 3348, 1954.

Comparison with Free Flight

23. C. K. Hunt Free Flight Model Measurements of the Longitudinal Stability of a Transonic Swept-Winged Aircraft. RAE TR 68178, 1968.
24. K. J. Turner A Roll-Balance Free-Flight Test Vehicle for the Measurement of Aileron Rolling Power and Roll Damping at $M = 0.8$ to 2.5 . ARC CP 679, 1965.
25. A. Naysmith
 and A. J. Ross A Review of the Role of Free Flight in Aerodynamic Research. RAE TM AERO 1091, 1968.

Theory of Dynamics

26. S. B. Gates
 and H. M. Lyon A Continuation of Longitudinal Stability and Control Analysis. Part I. General Theory. ARC R & M 2027, 1944.
27. H. M. Lyon,
 P. M. Truscott,
 E. I. Auterson
 and J. Whatham A Theoretical Analysis of Longitudinal Dynamic Stability in Gliding Flight. ARC R & M 2075, 1942.
28. S. Neumark Dynamic Longitudinal Stability in Level Flight, Including the Effects of Compressibility and Variations of Atmospheric Characteristics with Height. RAE Report Aero 2265, 1948.
29. A. C. Charters The Linearized Equations of Motion Underlying the Dynamic Stability of Aircraft, Spinning Projectiles, and Symmetrical Missiles. NACA TN 3350.
30. J. C. Jones The Speed Response of an Aircraft Constrained to Fly along a Straight Path in the Presence of Turbulence at Low Altitude. ARC R & M 3563, 1969.
31. H. R. Hopkin Routine Computing Methods for Stability and Response Investigations on Linear Systems. ARC R & M 2392, 1950.
32. M. Tobak On the Use of the Indicial Function Concept in the Analysis of Unsteady Motions of Wings and Wing-Tail Combinations. NACA Report 1188, 1954.

Theory of Dynamics—continued

- 33. G. T. S. Done The Flutter and Stability of Undamped Systems.
ARC R & M 3553, 1968.
- 34. B. A. M. Piggott Atmospheric Turbulence and Aircraft Height-Keeping Accuracy.
ARC CP 1009, 1968.
- 35. C. G. B. Mitchell Calculation of the Response of a Transport Aircraft to Continuous
Turbulence and Discrete Gusts and a Comparison with Flight
Measurements. ARC CP 1035, 1969.

Theoretical Predictions

- 36. H. H. B. M. Thomas State of the Art of Estimation of Derivatives.
AGARD Report 339, 1961.
- 37. M. Tobak
and H. C. Lessing Estimation of Rotary Stability Derivatives at Subsonic and
Transonic Speeds. AGARD Report 343, 1961.
- 38. H. C. Garner
and D. E. Lehrian Comparative Theoretical Calculations of Forces on Oscillating
Wings Through the Transonic Speed Range.
ARC R & M 3559, 1969.
- 39. K. J. Turner,
A. J. Ross
and C. Earley The Dynamic Stability Derivatives of a Slender Wing, a Com-
parison of Theory with Free-Flight Model Tests at Near-Zero
Lift, $M = 0.8$ to 2.4 . RAE TR 66170, 1966.
Also ARC CP 995, 1968.
- 40. J. P. Campbell
and M. O. McKinney Summary of Methods for Calculating Dynamic Lateral Stability
and Response and for Estimating Lateral Stability Derivatives.
NACA TN 2409, 1951.
- 41. D. E. Lehrian Calculation of Subsonic Flutter Derivatives for an Arrowhead
Wing with Control Surfaces. ARC R & M 3561, 1969.
- 42. M. Bourcier Application de la Méthode Asymptotique au Calcul des Dérivées
Aérodynamiques de Stabilité en Hypersonique Pour un Cone
Circulaire. ONERA N.T. 97, 1966.

Dynamic Simulation

- 43. L. J. Beecham,
W. L. Walters
and D. W. Partridge Proposals for an Integrated Wind Tunnel—Flight Dynamics
Simulator System.
ARC CP 789, 1965.
- 44. B. E. Pecover The New System for Controlling the Attitude and Motivator
Deflections of a Model in the RAE No. 19 Wind Tunnel.
ARC CP 1004, 1968.

Stability Augmentation

- 45. S. Neumark The Disturbed Longitudinal Motion of an Uncontrolled Aircraft
and of an Aircraft with Automatic Control. ARC R & M 2078, 1943.
- 46. L. J. Mueller Stability Augmentation for the Galaxy. Shell Aviation News
No. 371.

Pilot Requirements

- 47. W. Koven
and R. Wasicko Flying Quality Requirements for United States Navy and Air
Force Aircraft. AGARD Report 336, 1961.
- 48. H. J. Allwright Design Aims for Stability and Control of Piloted Aircraft.
AGARD Report 337, 1961.

Pilot Requirements—continued

49. J. K. B. Illingworth and H. W. Chinn Variable Stability and Control Tests on the S.C.1 Aircraft in Jet-Borne Flight, with Particular Reference to Desirable VTOL Flying Qualities. ARC R & M 3584, 1969.
50. D. R. Ellis and E. Seckel Flying Qualities of Small General Aviation Airplanes. Part I. The Influence of Dutch-Roll Frequency, Dutch-Roll Damping, and Dihedral Effect. FAA 1969.

Turbulence

51. H. Press, M. T. Meadows and I. Hadlock A Revaluation of Data on Atmospheric Turbulence and Airplane Gust Loads for Application in Spectral Calculations. NACA Report 1272, 1956.
52. J. K. Zbrozek and D. M. Ridland A Measured Power Spectrum of the Vertical Component of Atmospheric Turbulence. ARC CP 522, 1960.
53. D. J. Eckford The Influence of Elevator Movement on the Normal Accelerations Experienced by a Transport Aircraft in Moderate Turbulence. RAE TR 69008, 1969.

Instrumentation

54. J. B. Bratt, K. C. Wight and V. J. Tilly The Application of a "Wattmeter" Harmonic Analyser to the Measurement of Aerodynamic Damping for Pitching Oscillations. ARC R & M 2063, 1942.
55. C. O. Olsson and K. Orlik-Rückemann An Electronic Apparatus for Automatic Recording of the Logarithmic Decrement and Frequency of Oscillations in the Audio and Subaudio Frequency Range. FFA M52, 1954.
56. G. F. Forsyth Calibration and Accuracy Estimation for a Dampometer. ARL Aero TM247, 1969.
57. P. G. Pugh A Technique for the Direct Analysis of Alternating Signals into their Resolved Components. NPL Aero Report 1026, 1962.
58. V. S. Popov A Ratio-Meter Circuit Soviet Journal of Instrumentation and Control. No. 3, 1967.
59. F. J. Hawkins GRAMPA—An Automatic Technique for Exciting the Principal Modes of Vibration of Complex Structures. ARC R & M 3588, 1969.
60. G. N. Malcolm and G. T. Chapman A Computer Program for Systematically Analyzing Free-Flight Data to Determine the Aerodynamics of Axisymmetric Bodies. NASA TN D-4766, 1968.
61. M. Scherer Mesure des Dérivées Aérodynamiques en Ecoulement Transsonique et Supersonique. ONERA P104, 1962.
62. R. Rose Stability and Control Flight Testing—Some of the Test Instrumentation Requirements. ARC CP1015, 1967. RAE TR67108, 1967.
63. W. D. T. Hicks A Control and Measurement System for Aeroelastic Model Tests. ARC CP1045, 1969.

Sundry

64. C. S. Barnes and A. A. Woodfield Measurement of the Moments and Product of Inertia of the Fairey Delta 2 Aircraft. RAE TR68160, 1968.
65. D. R. Roberts and G. K. Hunt Further Measurements of Transient Pressures on a Narrow-Delta Wing Due to a Vertical Gust. ARC CP1012, 1968.

Sundry—continued

66. N. C. Lambourne On Certain Types of Self-Excited Oscillation Occurring with Aircraft Control Surfaces in Transonic Flow. NPL Aero Report 1191, 1966.
67. A. P. Cox The Design and Development of an Air-Bearing for the Measurement of Damping in Yaw on a Jet-Blowing Model. RAE TN Aero 2958, 1964.

Interference

68. W. P. Jones Wind-Tunnel Interference Effects on Measurements of Aerodynamic Coefficients for Oscillating Aerofoils. ARC R & M 2786, 1958.
69. H. C. Garner,
 A. W. Moore
 and K. C. Wight The Theory of Interference Effects on Dynamic Measurements in Slotted-Wall Tunnels at Subsonic Speeds and Comparisons with Experiment. ARC R & M 3500, 1968.
70. A. W. Moore
 and K. C. Wight An Experimental Investigation of Wall-Interference Effects on Dynamic Measurements on Half-Models in Ventilated Tunnels through the Transonic Speed Range. ARC R & M 3570, 1969. NPL Aero Report 1243.

Examples

71. H. Hall A Record of Information on Oscillatory Aerodynamic Derivative Measurements. ARC R & M 3232, 1962.
72. D. S. Woolston,
 S. A. Clevenson
 and S. A. Leadbetter Analytical and Experimental Investigation of Aerodynamic Forces and Moments on Low-Aspect-Ratio Wings Undergoing Flapping Oscillations. NACA TN 4302, 1958.
73. J. B. Bratt
 and K. C. Wight The Effect of Mean Incidence, Amplitude of Oscillation, Profile and Aspect Ratio on Pitching Moment Derivatives. ARC R & M 2064, 1945.
74. J. B. Bratt,
 K. C. Wight
 and A. Chinneck Free Oscillations of an Aerofoil about the Half-Chord Axis at High Incidences, and Pitching Moment Derivatives for Decaying Oscillations. ARC R & M 2214, 1940.
75. A. G. Rainey Measurement of Aerodynamic Forces for Various Mean Angles of Attack on an Airfoil Oscillating in Pitch and on Two Finite-Span Wings Oscillating in Bending with Emphasis on Damping in the Stall. NACA Report 1305, 1957.
76. D. H. Peckham Low-Speed Wind-Tunnel Tests on a Series of Uncambered Slender Pointed Wings with Sharp Edges. ARC R & M 3186, 1961.
77. H. F. Emerson
 and R. C. Robinson Experimental Wind-Tunnel Investigation of the Damping-in-Pitch Characteristics of Two Wing-Body Combinations. NASA Memo 11-30-58A, 1958.
78. J. S. Thompson,
 R. A. Fail
 and J. V. Inglesby Low Speed Wind Tunnel Measurements of the Oscillatory Lateral Stability Derivatives for a Model of a Slender Aircraft (HP115) Including the Effects of Frequency Parameter. RAE TR 69018, 1969.
79. J. B. Bratt,
 W. G. Raymer
 and J. E. G. Townsend Measurements of the Direct Pitching-Moment Derivatives for Two-Dimensional Flow at Subsonic Speeds and for a Wing of Aspect Ratio 4 at Subsonic Speeds. ARC R & M 3257, 1962.
80. A. R. Glasson The Dynamic Stability of a Rolling Flexible Missile. WRE TN HSA 138, 1968.

Examples—continued

81. W. P. Henderson
and T. G. Gainen Rolling Stability Derivatives of a Variable-Sweep Tactical Fighter
Model at Subsonic and Transonic Speeds. NASA TN D3845, 1967.
82. A. M. Cook
and D. G. Jones Large Scale Wind-Tunnel Investigation to Improve the Low-Speed
Longitudinal Stability at High Lift of a Supersonic Transport with
Variable-Sweep Wings. NASA TN D-5005, 1969.

Calibration Models

83. R. Fail
and H. C. Garner Calibration Models for Dynamic Stability Tests.
AGARD Report 563, 1968.

Control Requirements—Modern Aircraft

84. M. G. Kotik Critical Regimes of Supersonic Jet Aircraft—Stall and Spin.
Mashinostroyeniye 1967. NASA TT F-526, 1969.
85. ——— Stability and Control (Parts 1 and 2).
AGARD Conference Proceedings 17, 1966.

This Series

86. G. F. Forsyth An Introduction to Dynamic Derivatives, the Concept of
Derivatives. ARL AN330, 1971.

DOCUMENT CONTROL DATA SHEET

Security classification of this page: Unclassified

1. Document Numbers

- (a) AR Number:
AR-001-296
- (b) Document Series and Number:
Aerodynamics Note 377
- (c) Report Number:
ARL-Aero-Note-377 ✓

2. Security Classification

- (a) Complete document:
Unclassified
- (b) Title in isolation:
Unclassified
- (c) Summary in isolation:
Unclassified

3. Title: AN INTRODUCTION TO DYNAMIC DERIVATES

(2) The Equations of Motion for Wind Tunnel Pitch-Yaw Oscillation Rigs ✓

4. Personal Author(s):

G. F. Forsyth

5. Document Date:

August, 1978

6. Type of Report and Period Covered:

7. Corporate Author(s):

Aeronautical Research Laboratories

8. Reference Numbers

(a) Task:

9. Cost Code:

54 7721

(b) Sponsoring Agency:

10. Imprint:

Aeronautical Research Laboratories,
Melbourne

11. Computer Program(s)

(Title(s) and language(s)):

12. Release Limitations (of the document):

Approved for Public Release

12-0. Overseas:

No.		P.R.	1	A		B		C		D		E	
-----	--	------	---	---	--	---	--	---	--	---	--	---	--

13. Announcement Limitations (of the information on this page):

No Limitation

14. Descriptors:

Equations of motion
Wind tunnels
Stability

Dynamic derivatives
Dynamic stability

15. Cosati Codes:

1201
1402

16.

ABSTRACT

The equations of motion are developed for a simplified free flight pitch-yaw system and for spring-mounted and rigidly-driven wind tunnel systems. For the spring-mounted system both initial displacement and forced-oscillation conditions are examined. A simplified cable towed system is also derived. A bibliography is included.

DISTRIBUTION

AUSTRALIA

Copy No.

DEPARTMENT OF DEFENCE

Central Office

Chief Defence Scientist	1
Executive Controller, ADSS	2
Superintendent, Defence Science Administration	3
Australian Defence Scientific & Technical Rep. (U.K.)	4
Counsellor, Defence Science (U.S.A.)	5
Defence Library	6
JIO	7
Assistant Secretary, DISB	8-23

Aeronautical Research Laboratories

Chief Superintendent	24
Superintendent, Aerodynamics Division	25
Divisional File, Aerodynamics Division	26
Author: G. F. Forsyth	27
Library	28
Group Leader, Transonic Aerodynamics	29-30

Materials Research Laboratories

Library	31
---------	----

Defence Research Centre

Library	32
---------	----

Central Studies Establishment Information Centre

Library	33
---------	----

Engineering Development Establishment

Library	34
---------	----

RAN Research Laboratory

Library	35
---------	----

Navy Office

Naval Scientific Adviser	36
--------------------------	----

Army Office

Army Scientific Adviser	37
Royal Military College	38
US Army Standardisation Group	39

Air Office

Air Force Scientific Adviser	40
Aircraft Research and Development Unit	41
Engineering (CAFTS) Library	42
D. Air Eng.	43
HQ Support Command (SENGSO)	44

DEPARTMENT OF PRODUCTIVITY**Government Aircraft Factories**

Library 45

DEPARTMENT OF TRANSPORT

Director General/Library 46

Airworthiness Group (Mr. R. Ferrari) 47

STATUTORY, STATE AUTHORITIES AND INDUSTRY

Qantas, Library 48

Trans Australia Airlines, Library 49

Ansett Airlines of Australia, Library 50

Commonwealth Aircraft Corporation (Manager) 51

Commonwealth Aircraft Corporation (Manager of Engineering) 52

Hawker de Havilland Pty. Ltd., (Librarian) Bankstown 53

Hawker de Havilland Pty. Ltd., (Manager) Lidcombe 54

UNIVERSITIES AND COLLEGES

Adelaide Barr Smith Library 55

Australian National Library 56

Flinders Library 57

James Cook Library 58

La Trobe Library 59

Melbourne Engineering Library 60

Monash Library 61

Newcastle Library 62

New England Library 63

New South Wales Physical Sciences Library 64

Queensland Library 65

Prof. A. F. Pillow, App. Mathematics 66

Sydney Prof. G. A. Bird, Aero. Eng. 67

Tasmania Engineering Library 68

Western Australia Library 69

R.M.I.T. Library 70

Mr. H. Millicer, Aero. Eng. 71

E. Stokes, Mech. & Aero. Eng. 72

CANADA

NRC, National Aeronautics Establishment, Library 73

UNIVERSITIES

McGill Library 74

FRANCE

AGARD, Library 75

ONERA, Library 76

Service de Documentation, Technique de l'Aeronautique 77

GERMANY

ZLDI 78

INDIA

Civil Aviation Department (Director) 79

Defence Ministry, Aero Development Establishment, Library 80

Hindustan Aeronautics Ltd., Library 81

Indian Institute of Science, Library 82

Indian Institute of Technology, Library 83

National Aeronautical Laboratory (Director) 84

ISRAEL		
Technion—Israel Institute of Technology (Prof. J. Singer)		85
ITALY		
Associazione Italiana di Aeronautica e Astronautica (Professor A. Evla)		86
JAPAN		
National Aerospace Laboratory, Library		87
UNIVERSITIES		
Tohoku (Sendai)	Library	88
Tokyo	Institute of Space & Aerospace	89
NETHERLANDS		
Central Organization for Applied Science Research in the Netherlands TNO,		
Library		90
National Aerospace Laboratory (NLR), Library		91
NEW ZEALAND		
Air Department, R.N.Z.A.F. Aero. Documents Section		92
Transport Ministry, Civil Aviation Division, Library		93
UNIVERSITIES		
Canterbury	Library	94
SWEDEN		
Aeronautical Research Institute		95
Chalmers Institute of Technology, Library		96
Kungl. Tekniska Hogskolens		97
SAAB, Library		98
Research Institute of the Swedish National Defence		99
SWITZERLAND		
Institute of Aerodynamics E.T.H.		100
Institute of Aerodynamics (Professor J. Ackeret)		101
UNITED KINGDOM		
Aeronautical Research Council, N.P.L. (Secretary)		102
CAARC NPL (Secretary)		103
Royal Aircraft Establishment Library, Farnborough		104
Royal Aircraft Establishment Library, Bedford		105
CATC Secretariat		106
Aircraft and Armament Experimental Establishment		107
British Library, Science Reference Library		108
British Library, Lending Division		109
Aircraft Research Association, Library		110
Hawker Siddeley Aviation Ltd., Brough		111
Hawker Siddeley Aviation Ltd., Greengate		112
Hawker Siddeley Aviation Ltd., Kingston-upon-Thames		113
Hawker Siddeley Dynamics Ltd., Hatfield		114
British Aircraft Corp. (Holdings) Ltd., Comm. Aircraft Div.		115
British Aircraft Corp. (Holdings) Ltd., Military Aircraft		116
British Aircraft Corp. (Holdings) Ltd., Comm. Aviation Div.		117
British Hovercraft Corporation Ltd., (East Cowes)		118
Short Brothers & Harland		119
Westland Helicopters Ltd.		120

UNIVERSITIES AND COLLEGES

Bristol	Library, Engineering Department	121
	Dr. W. Chester, Mathematics Dept.	122
Cambridge	Library, Engineering Department	123
	Professor G. K. Batchelor	124
	Professor M. J. Lighthill	125
Liverpool	Professor J. H. Preston, Fluid Mechanics Department	126
London	Professor A. D. Young, Queens College	127
Manchester	Professor, Applied Mathematics	128
	Professor N. Johannessen	129
Nottingham	Library	130
Southampton	Library	131
Strathclyde	Library	132
Cranfield Institute of Technology	Library	133
	Professor Lefebvre	134
Imperial College	The Head	135

UNITED STATES OF AMERICA

NASA Scientific and Technical Information Facility	136
Sandia Group (Research Organisation)	137
American Institute of Aeronautics and Astronautics	138
Boeing Co. Head Office	139
Lockheed Aircraft Co. (Director)	140
McDonnell Douglas Corporation (Director)	141
United Technologies Corporation, Fluid Dynamics Labs.	142

UNIVERSITIES AND COLLEGES

Brown (R.I.)	Professor R. E. Meyer, Division of Applied Mathematics	143
California	Dr. M. Holt, Dept. of Aeronautics	144
Cornell (New York)	Library, Aeronautical Laboratories	145
Florida	Mark H. Clarkson, Department of Aeronautical Engineering	146
Harvard	Professor A. F. Carrier, Division of Engineering and Applied Mathematics	147
Illinois	Professor N. M. Newmark, Talbot Laboratories	148
Johns Hopkins	Professor S. Corrsin, Department of Mechanical Engineering	149
Princeton	Professor G. L. Mellor	150
Stanford	Library, Department of Aeronautics	151
Wisconsin	Memorial Library, Serials Department	153
Brooklyn Institute of Polytechnology	Library, Polytech Aeronautical Laboratories	154
California Institute of Technology	Library, Guggenheim Aeronautical Laboratories	155
Massachusetts Inst. of Technology	Professor E. Rensner	156

Spares

157-166